



## 1, OUTLINE DRAWING

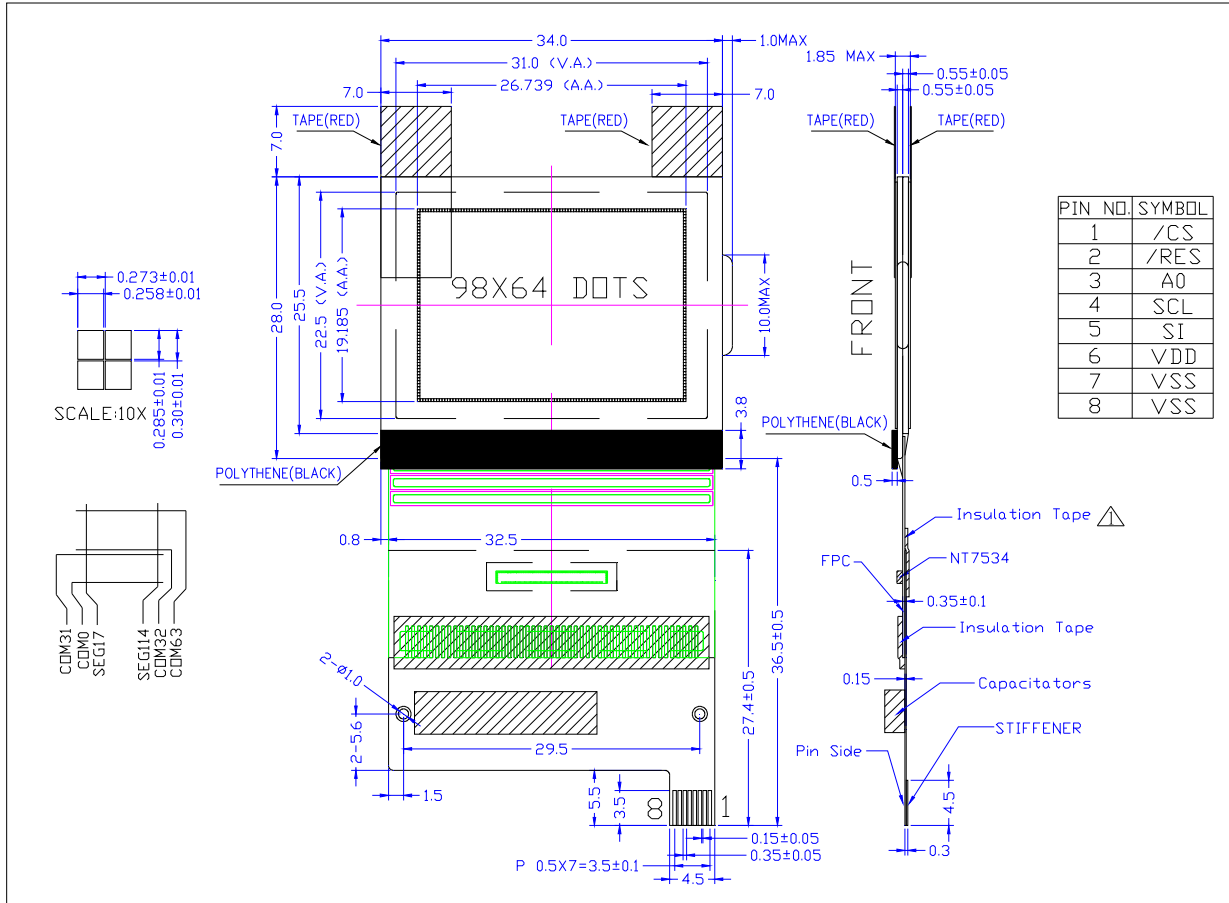

## 2, BLOCK DIAGRAM

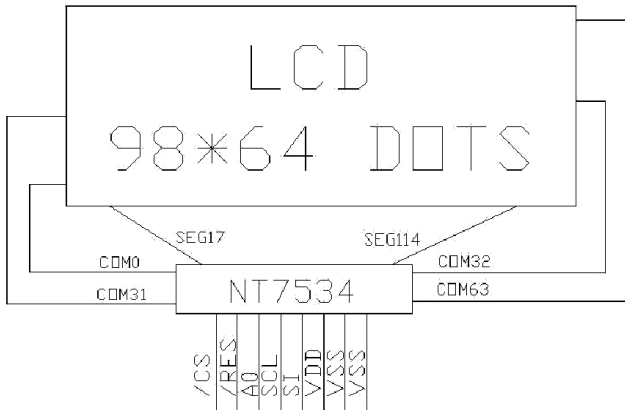

## 5, TERMINAL FUNCTIONS

Pin	Name	Level	Functions
1	/CS	L	Chip select
2	RES	L	Reset signal
3	A0	H/L	Data/Command
4	SCL	H/L	CLOCK
5	SI	H/L	Data
6	VDD	-	Power supply
7	VSS	-	Power supply (GND)
8	VSS	-	Power supply (GND)

## 3, DISPLAY CHARACTERISTICS

LCD Display mode	Fstn-Transflective-Positive
Driving method	1/65duty, 1/9 bias
Backlight	None

## 4, ELECTRICAL CHARACTERISTICS

Item	Symbol	Min.	Typ.	Max.
Logic Power Supply Voltage(V)	V <sub>DD</sub>		3.3	
Input Voltage(V)	V <sub>Ih</sub>	0.7V <sub>DD</sub>		V <sub>DD</sub>
Output Voltage(V)	V <sub>Il</sub>	0		0.3V <sub>DD</sub>
LCD Driving Voltage(V)	V <sub>lcd</sub>		10.0	